


CLAVE	MODELO	POTENCIA		MOTOR	H MAXIMA	DESCARGA	RANGO DE OPERACIÓN		FLOTADOR INTEGRADO	DIMENSIONES	PESO
		HP	W				Hm	Q l/m			
2405	QDX1.5-17-0.37T	1/2	370	1F 127V	18,3	1"	17÷ 6	17÷80	OPCIONAL	380X230X221	11.5KG
2405F	QDX1.5-17-0.37TF	1/2	370		18,3		17÷ 6	17÷80	SI	380X230X221	11.6KG
2406	QDX1.5-25-0.55T	3/4	550		24,7		24÷ 11	17÷107	OPCIONAL	395X270X240	15.5KG
2407	QDX10-12-0.55T	3/4	550		17	1,5"	15÷ 6	100÷216	SI	390X270X240	16.5KG
2408	QDX1.5-32-0.75T	1	750		33	1"	32÷ 12.7	17÷112	OPCIONAL	220X180X365	16.7KG
2409	QDX3-24-0.75T	1	750		26		24÷ 10	50÷110	SI	395X270X240	17.5KG
2410	QDX10-16-0.75T	1	750		19,5	1,5"	17÷ 6	130÷250		SI	395X270X240

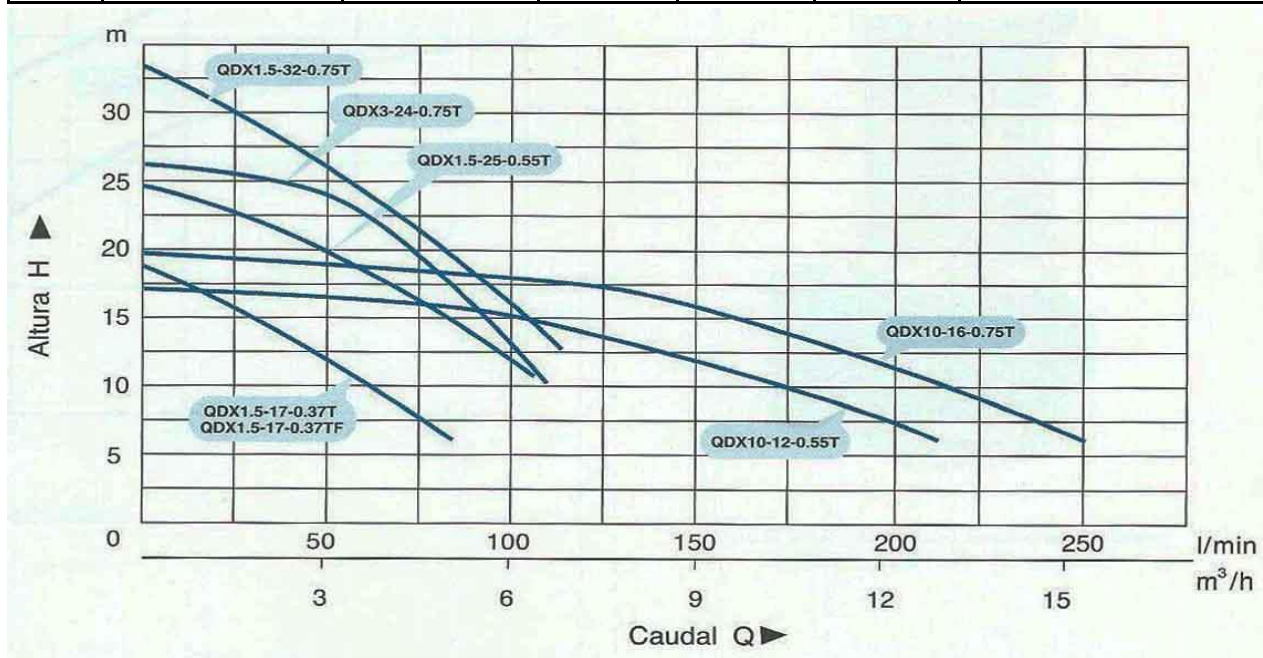

[WWW.ZONAINDUSTRIAL.MX](http://WWW.ZONAINDUSTRIAL.MX)