


CBB60, Uso Normal y de Trabajo, Redondo con Terminal y Tornillo

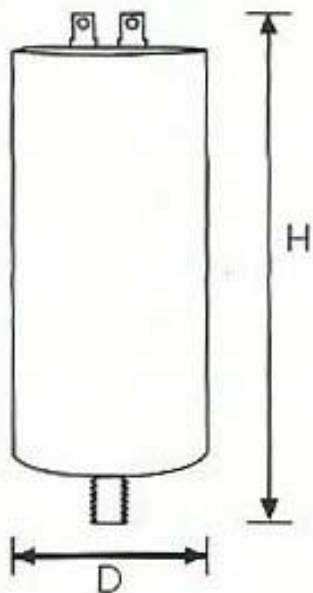

CLAVE	MODELO	CAPACIDAD	V	T. MAX.	D	H	USO
0882	CBB60/TT/60uf/250V	60 μ f	250	70°C	41 mm	122 mm	Normal, de trabajo
0883	CBB60/TT/65uf/250V	65 μ f	250	85°C	40 mm	114 mm	Normal, de trabajo
0884	CBB60/TT/70uf/250V	70 μ f	250	85°C	42 mm	92.5 mm	Normal, de trabajo
0885	CBB60/TT/75uf/250V	75 μ f	250	85°C	42 mm	92.5 mm	Normal, de trabajo
0886	CBB60/TT/80uf/250V	80 μ f	250	70°C	50 mm	124 mm	Normal, de trabajo
0887	CBB60/TT/100uf/250V	100 μ f	250	85°C	50 mm	100 mm	Normal, de trabajo
0888	CBB60/TT/120uf/250V	120 μ f	250	70°C	50 mm	147 mm	Normal, de trabajo
0889	CBB60/TT/125uf/250V	125 μ f	250	70°C	50 mm	149 mm	Normal, de trabajo
0890	CBB60/TT/130uf/250V	130 μ f	250	70°C	50 mm	150 mm	Normal, de trabajo